



Features


- 792, 808, 888, 976, 1064, 1210, 1320, 1470, 1532, 1710, and 1920 nm
- Detachable fiber
- Armor or bare fiber delivery
- Dichroic filter protection available
- Cladding-free power
- Conduction cooled package
- Thermistor standard
- Aiming Beam, photodiode optional

Applications

- Laser pumping: Fiber lasers, Solid state lasers
- Materials processing: Marking, Soldering, Plastics welding
- Medical: Dental, Ophthalmology, Therapeutic
- Defense: Target illumination, LIDAR

Benefits

- Compact
- High Efficiency
- Long working distance and sharper features for materials processing applications

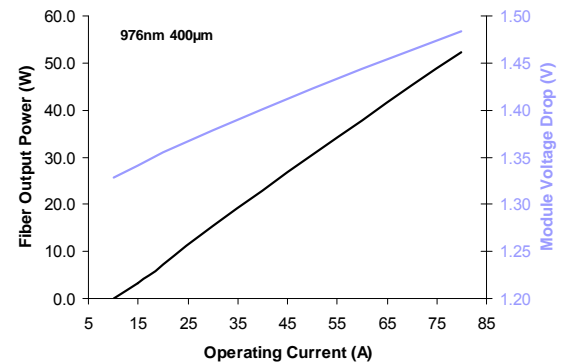

Model Number*	6007-0002	6009-0000	6009-0002
Output power	≥ 20 W	≥ 35 W	≥ 50 W
Operating current	< 35 A	< 64 A	< 80 A
Operating voltage	< 2 V	< 1.6 V	< 1.5 V
Typical efficiency %	36	37	47
Center wavelength	792 nm	976 nm	976 nm
Wavelength tolerance	± 3 nm	± 3 nm	± 3 nm
Spectral width (FWHM)	<2.5 nm	<5 nm	<5 nm
Wavelength temp. coefficient	<0.3 nm/°C	<0.3 nm/°C	<0.3 nm/°C
Fiber core diameter (nominal)	100 µm	200 µm	400 µm
Fiber NA (nominal)	0.22	0.22	0.22
Fiber length	2 m	2 m	2 m
Fiber output connector	SMA	SMA	SMA
Operating/Test temperature	20° C	20° C	20° C
Internal thermistor	NTC 10K Ω	NTC 10K Ω	NTC 10K Ω
Module size (L x W x H)	100 mm x 41.5 mm x 31.5 mm		


Warning: Class 4 Laser, Invisible Laser Radiation – Avoid Eye or Skin Exposure to Direct or Scattered Radiation.

Laser Operations LLC

15632 Roxford Street • Sylmar, CA 91342 • Phone + 1(818) 986-0000 • Fax: +1(818) 698-0428
www.QPCLasers.com • email: info@laseroperations.net



Module Size

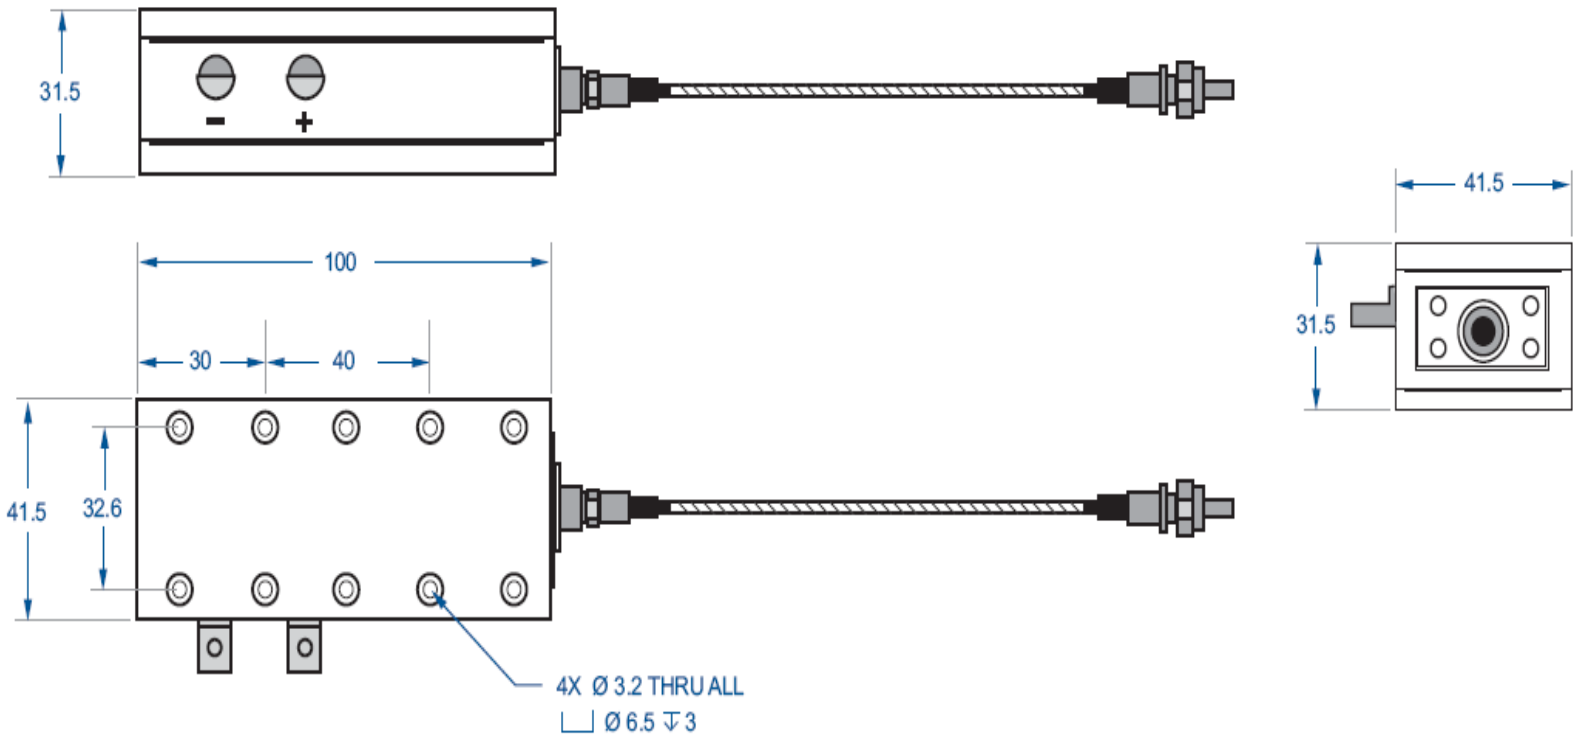

BRIGHTNESS and POWER
Breaking Performance Barriers through Semiconductor Laser Innovation

Laser Operations LLC

15632 Roxford Street • Sylmar, CA 91342 • Phone + 1(818) 986-0000 • Fax: +1(818) 698-0428
www.QPCLasers.com • email: info@laseroperations.net