


Features

- 800 W cooling capacity
- Compact
- CE Compliant
- Digital Temperature control $\pm 0.1^{\circ}\text{C}$
- Adjustable flow rate
- Monitor critical performance parameters
- Suitable for all wavelengths



Applications





- For use with Laser Operations' Ultra Series high power fiber coupled laser modules

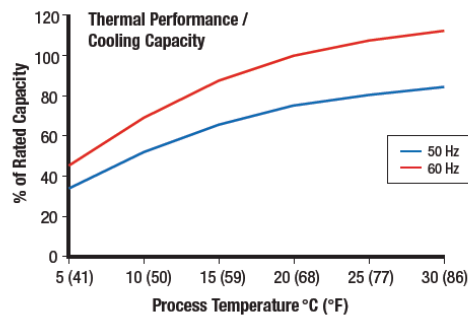

Model Number	9902-0001
Cooling Capacities	800 W
Heat Dissipation	Dissipate heat to ambient air via fan
Process Coolant Temperature Range	5-35°C
Ambient Temperature Range	15-35°C
Process Coolant Temperature Stability	$\pm 0.1^{\circ}\text{C}$
Input Power Requirements	100, 120, 200, 208, 230 Volts AC 50 or 60 Hz, Single phase
Full Load Amperage (typical)	3.5 Amps @ 120, 1.8 Amps @ 230 VAC
Weight	49-55 dry lbs, 22-25 kg
Cabinet Dimensions (WxDxH)	435 mm x 438 mm x 221 mm
Communications (RS-485)	Optional Feature: Serial communications from process coolant temperature controller w/ port via (DA 9S) connector located on back panel

Warning: Class 4 Laser, Invisible Laser Radiation – Avoid Eye or Skin Exposure to Direct or Scattered Radiation.

Mechanical Drawings

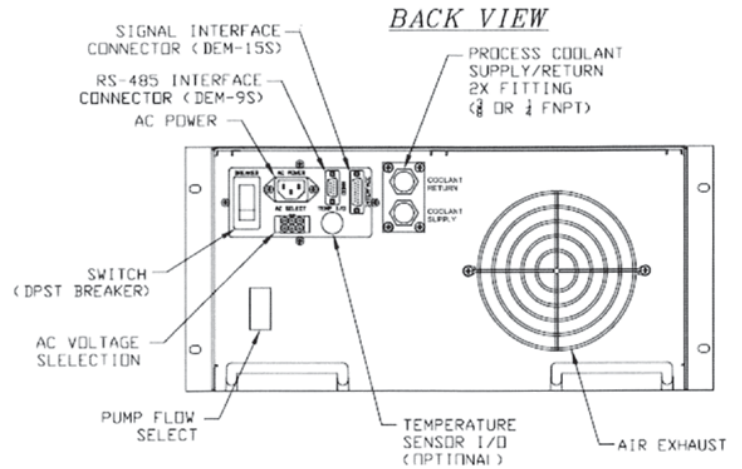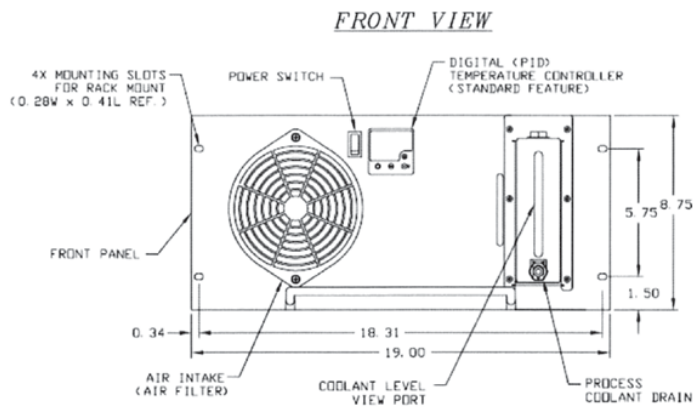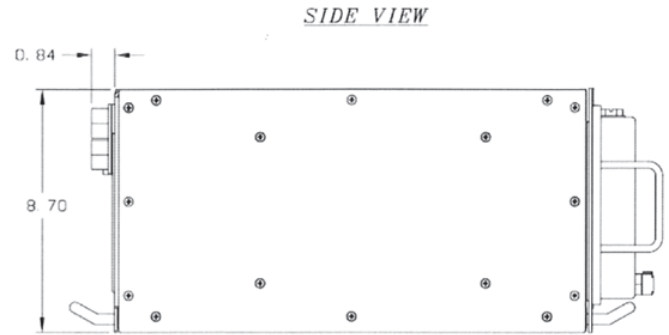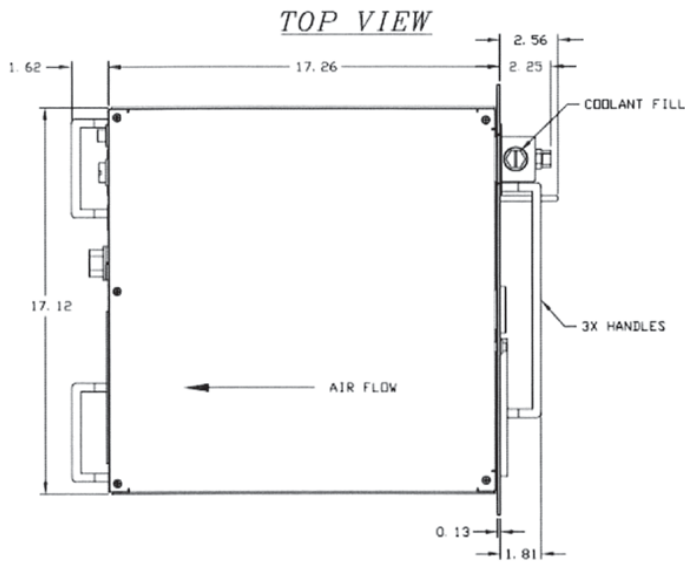

BRIGHTNESS and POWER
Breaking Performance Barriers through Semiconductor Laser Innovation

Laser Operations LLC

15632 Roxford Street • Sylmar, CA 91342 • Phone + 1(818) 986-0000 • Fax: +1(818) 698-0428
www.QPCLasers.com • email: info@laseroperations.net