
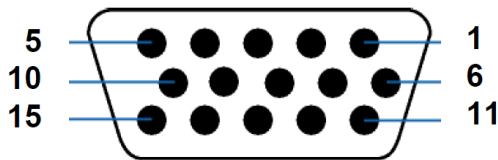
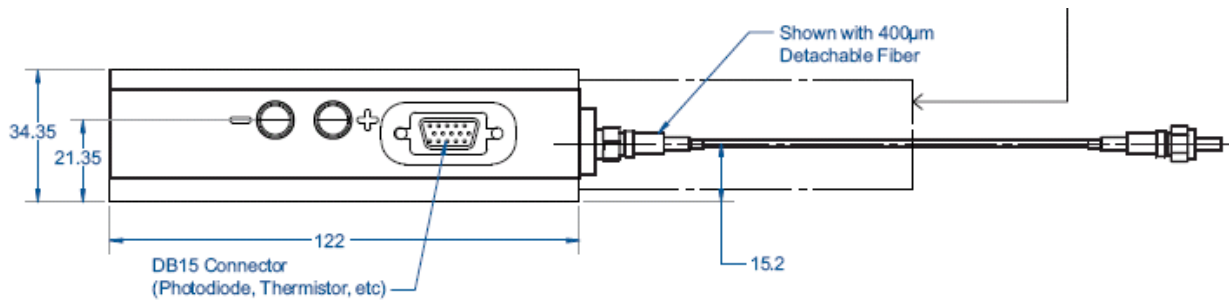


**Item Number: 6217-0003****Item Description: 1710nm, 30W, 400um fiber-coupled module with optional aiming beam**

Parameter	Units	Minimum	Typical	Maximum
<b>Optical</b>				
CW Output Power from Fiber	W	30		
Center Wavelength	nm	1690	1710	1730
Spectral Width (FWHM)	nm			20
Fiber Core Diameter	µm		400	
Fiber NA	-		0.22	
Temperature tuning coefficient	nm/°C		0.7	
<b>Electrical (FCA)</b>				
Operating Current (I <sub>OP</sub> )	A		45	50
Operating Voltage (V <sub>OP</sub> )	V		3.8	4.2
E-O conversion efficiency	%		17	
<b>Thermal</b>				
Operating Temperature	°C	20	25	30
Storage Temperature	°C	-20		70
<b>Mechanical</b>				
Module dimensions	mm		122 x 100 x 34.4	
Fiber length	m		5	
Fiber Input connector	-		HP-SMA 905	
<b>Thermistor</b>				
Type	-		NTC	
Resistance at 25°C	KΩ		10	
<b>Optional Aiming Beam</b>				
Wavelength	nm			635 +/- 10
Optical power	mW			>=1.0
<b>Control signal</b>				
Interfacing	DB-15 connector at module back wall			

**Notes**

1. Specified performance to be tested at 25C module base temperature
2. Non-condensing operating environment required

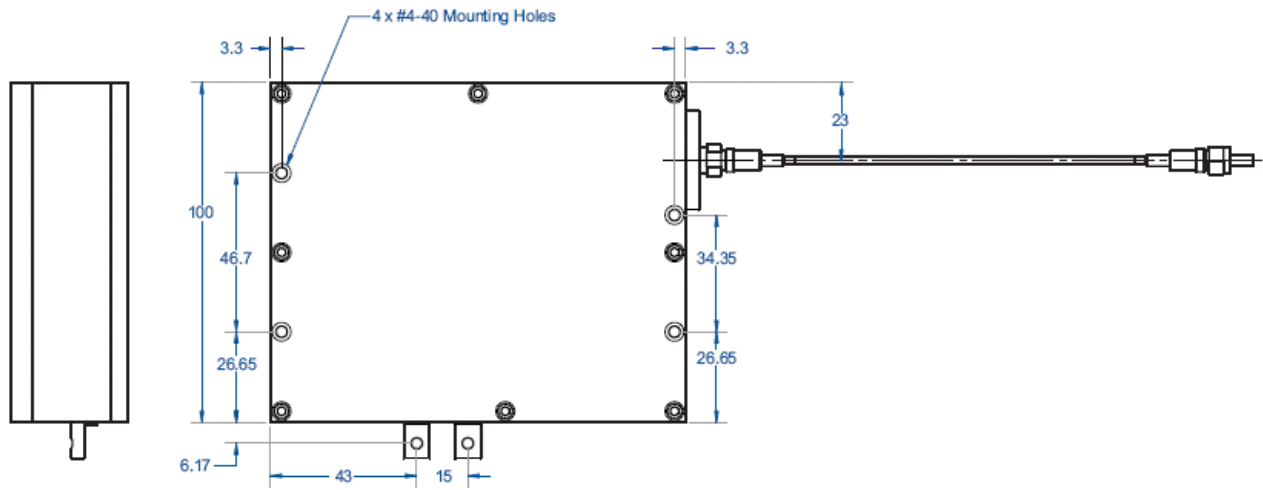

Pin number	Assignment
1	Thermistor
2	Thermistor
3	Not used
4	Not used
5	Not used
6	Not used
7	Not used
8	Not used
9	Not used
10	Not used
11	Not used
12	Not used
13	Not used
14	Aiming Beam +2.6~5V
15	Aiming Beam Ground

