
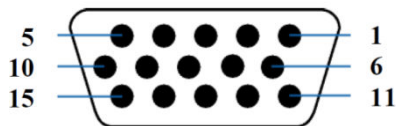


Item Number: 6015-0010**Item Description: 1540nm, 12W, 105um fiber-coupled module**

Parameter	Units	Minimum	Typical	Maximum
Optical				
CW Output Power from Fiber	W	12		
Center Wavelength	nm	1520	1540	1560
Spectral Width (FWHM)	nm			15
Fiber Core Diameter	µm		105	
Fiber NA	-		0.22	
Temperature tuning coefficient	nm/°C		0.5	
Electrical (FCA)				
Operating Current (I _{OP})	A		44	50
Operating Voltage (V _{OP})	V		1.3	1.5
E-O conversion efficiency	%		20	
Thermal				
Operating Temperature	°C	20		30
Storage Temperature	°C	-20		70
Mechanical				
Module dimensions	mm		88 x 40 x 36	
Fiber length	m		user defined	
Fiber Input connector	-		HP-SMA 905	
Thermistor				
Type	-		NTC	
Resistance at 25°C	KΩ		10	
Optional Aiming Beam				
Wavelength	nm			635 +/- 10
Optical power	mW			>=1.0
Optional Monitoring Photo Diode				
Output signal at full power	µA	50		250

Notes

1. Specified performance to be tested at 20C module base temperature
2. Non-condensing operating environment required

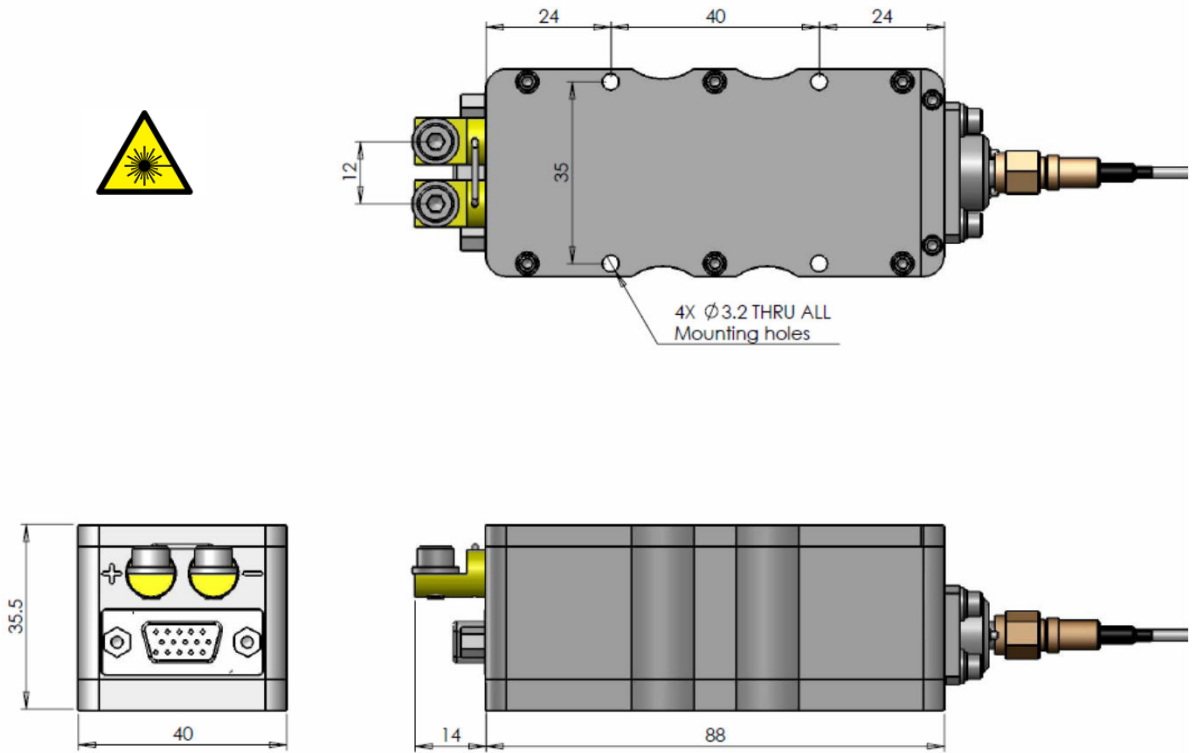

Pin number	Assignment
1	Not used
2	Not used
3	Aiming beam "+"
4	Aiming beam Ground
5	Monitor Photodiode "+"
6	Monitor Photodiode "-"
7	Not used
8	Not used
9	Not used
10	Not used
11	Not used
12	Not used
13	Not used
14	Thermistor (NTC)
15	Thermistor (NTC)

