
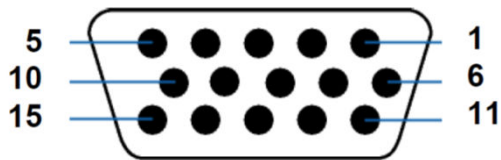


Item Number: 6214-0011**Item Description: 1470nm, 18W, 105um fiber-pigtailed module**

Parameter	Units	Minimum	Typical	Maximum
Optical				
CW Output Power from Fiber	W	18		
Center Wavelength	nm	1460	1470	1480
Spectral Width (FWHM)	nm			10
Fiber Core Diameter	µm		105	
Fiber NA	-		0.22	
Temperature tuning coefficient	nm/°C		0.45	
Electrical (FCA)				
Operating Current (I _{OP})	A		35	40
Operating Voltage (V _{OP})	V		2.5	2.8
E-O conversion efficiency	%		20	
Thermal				
Operating Temperature	°C	20	25	30
Storage Temperature	°C	-20		70
Mechanical				
Module dimensions	mm		122 x 100 x 34.4	
Fiber length	m		2	
Fiber output connector	-		Bare	
Thermistor				
Type	-		NTC	
Resistance at 25°C	KΩ		10	
Optional Monitoring Photo Diode				
Output signal at full power	µA	50		250
Control signal				
Interfacing	DB-15 connector at module back wall			

Notes

1. Specified performance to be tested at 25C module base temperature
2. Non-condensing operating environment required

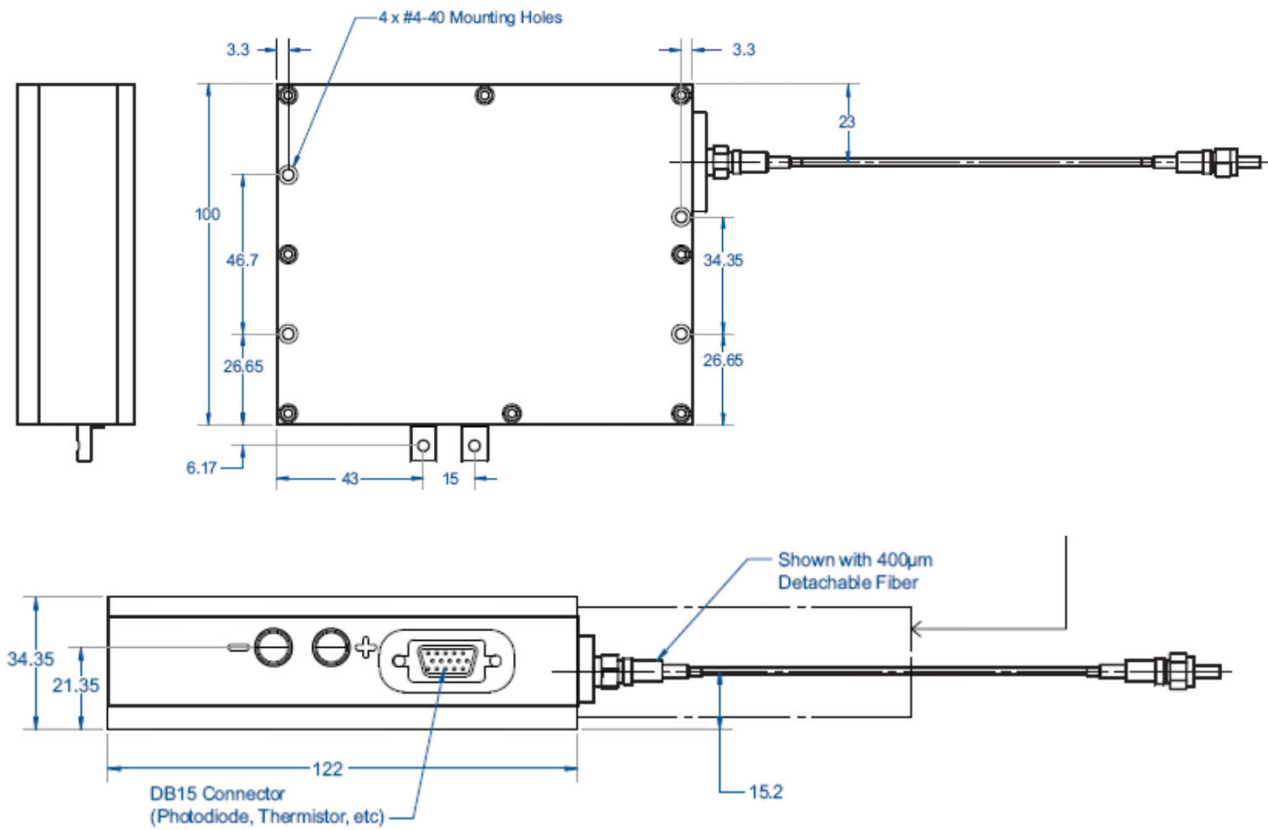

Pin number	Assignment
1	Thermistor
2	Thermistor
3	Not used
4	Not used
5	Monitor Photodiode +
6	Monitor Photodiode -
7	Not used
8	Not used
9	Not used
10	Not used
11	Not used
12	Not used
13	Not used
14	Not used
15	Not used

