
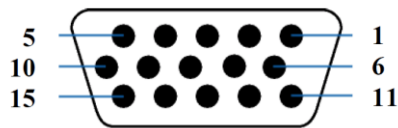


Item Number: 6018-M003**Item Description: 1875nm, 5W, 400um fiber-coupled module with *Medica* options**

Parameter	Units	Minimum	Typical	Maximum
Optical				
CW Output Power from Fiber	W	5		
Center Wavelength	nm	1870	1875	1880
Spectral Width (FWHM)	nm			20
Fiber Core Diameter	µm		400	
Fiber NA	-		0.22	
Temperature tuning coefficient	nm/°C		0.9	
Electrical (FCA)				
Operating Current (I _{OP})	A		45	55
Operating Voltage (V _{OP})	V		1.0	1.2
E-O conversion efficiency	%		10	
Thermal				
Operating Temperature	°C	20	25	30
Storage Temperature	°C	-20		70
Mechanical				
Module dimensions	mm		88 x 40 x 36	
Fiber length	m		user defined	
Fiber Input connector	-		HP-SMA 905	
Thermistor				
Type	-		NTC	
Resistance at 25°C	KΩ		10	
Optional Aiming Beam				
Wavelength	nm			635 +/- 10
Optical power	mW			>=1.0
Optional Monitoring Photo Diode				
Output signal at full power	µA	50		250
Optional Fiber detection sensor				
Type of fiber sensor		Opto-electrical fiber sensor		
Testing method		Check the voltage signal across pion#1and #9 at DB-15 connector.		
Signal		≤0.5V with fiber, ≥4.5V w/o fiber		
Optional Blast shield				
Maintenance		Field replaceable		
Control signal				
Interfacing		DB-15 connector at module back wall		

Notes

1. Temperature tuning in the range of 25+/-5C is required to meet the wavelength spec
2. Non-condensing operating environment required

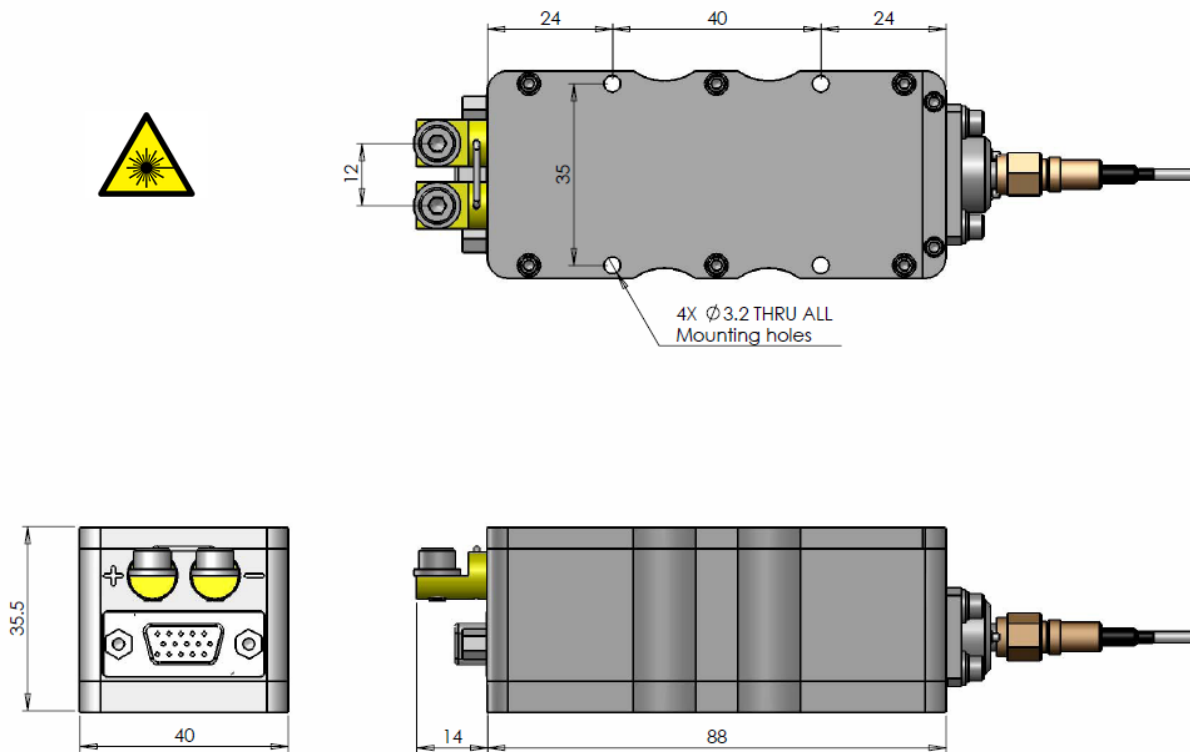

Pin number	Assignment
1	Fiber detection sensor output signal
2	Fiber detection sensor "+5V"
3	Aiming beam "+"
4	Aiming beam Ground
5	Monitor Photodiode "+"
6	Monitor Photodiode "-"
7	Not used
8	Not used
9	Fiber sensor common ground
10	Not used
11	Not used
12	Not used
13	Not used
14	Thermistor (NTC)
15	Thermistor (NTC)

